



### FEATURES

- 100% oil free
- 100% duty cycle
- low noise and vibration level
- easy maintenance
- long-life, 2-year warranty
- 8000 hours cup life at 8bar
- 4000 hours maintenance interval for the dryer

### Description

- built-in 2-column adsorption dryer
- pressure dew point down to -40°C
- 1µm air filtration (class 2 for dust according to ISO8573.1:2010)
- pressure regulator included
- receiver with internal coating and 5-year warranty


### OTHER VERSIONS

- without dryer (OF302-25M)


### Product specifications

Model	OF302-25MQ2			
Voltage	V	1x230	1x230	1x120
Frequency	Hz	50	60	60
Motor	HP	0.6	0.6	0.6
	kW	0.44	0.44	0.44
Displacement	l/min	108	138	138
Air flow @ 8bar	l/min	30	36	36
	cfm	1.06	1.27	1.27
Max. pressure	bar	8	8	8
	psi	120	120	120
Max. current	A	3.8	4.1	6.6
Receiver volume	litres	25	25	25
	gallon	6.6	6.6	6.6
Weight	kg	83	83	83
	lbs	183	183	183
Noise level	dB(A)/1m	47	48	48
Duty cycle		100%	100%	100%

### Air flow / pressure curve

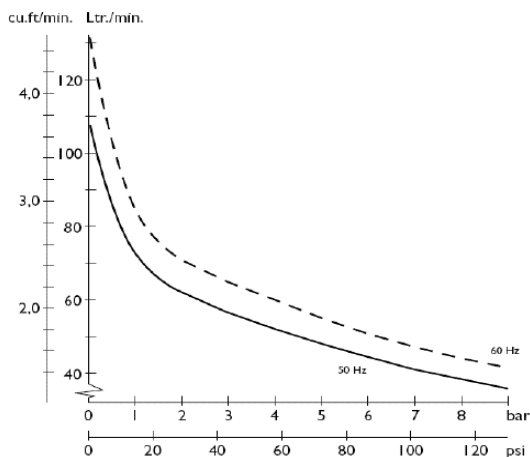

### Dimensions\*

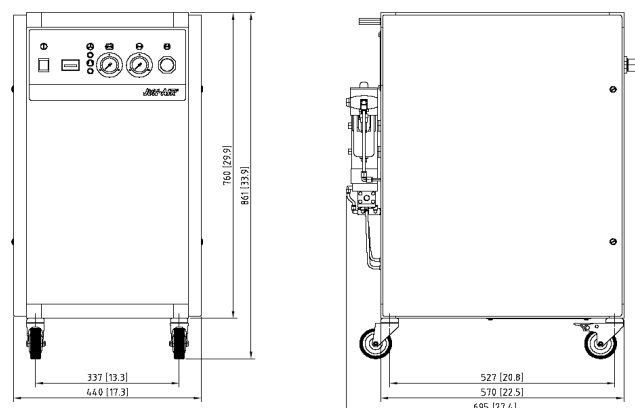

1) air flow on curve should be reduced by 18-20% on units with dryers

\* for unit without accessories or options